

Graco S340e Stucco & EIFS Pump

NKC PACKAGE




Benefits of S340e for Stucco & EIFS

- ♦ Piston pump easily handles Stucco & EIFS materials.
Stucco applications include scratch coat, brown coat & finish coat.
EIFS include air/water-resistive barriers, EIFS base & finish coats.
- ♦ Plug and play – the ToughTek S340e pump plugs into a standard 120V wall outlet – or use with a 5.5 kW generator
- ♦ Optional remote start/stop box and variable speed control
- ♦ Compact design makes it easy to transport anywhere
- ♦ Durable piston pump withstands highly abrasive Stucco & EIFS materials. Quick knockdown makes maintenance fast & easy.

[CLICK HERE TO WATCH VIDEO](#)

NKC PACKAGE

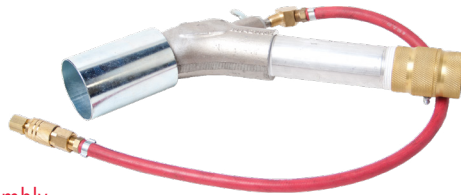

Nozzle Assembly



Hose Package

- ♦ 1 1/2" x 50ft, 1 1/4" x 25ft (2), 1233 psi, Airline, Reducer, & Steel Kamlocks

SPECIFICATIONS

Pump type	2-ball piston
Max working pressure	600 psi
Max spray pressure	500 psi
Max output*	Up to 40 bags/hour
Volume control	Variable
Max hose length	100 ft (30.5 m)
Hopper capacity	20 gal (76 L)
Hopper opening	22.5" W x 14" D
Hopper/filling height	26 in
Pump outlet size	1.5" cam groove
Dimensions	45.5" L x 24" W x 38" H
Weight	210 lb (without hose and applicator)
Chemical compatibility	Water based materials
Wetted parts	SST, aluminum, plated steel, PTFE, UHMWPE, LLDPE, urethane
Remote on/off switch	Optional

* Tested with pre-blended base coat stucco. Performance will vary based on material, mix consistency, hose size and other factors. ** Flow rate based on test with water. Performance will vary depending on material & hose length.

INCLUDES TECHNICAL SUPPORT

Nathan Kimmel Co, LLC, 4876 Alhambra Ave., Los Angeles, CA 90032

800.421.0005 ♦ www.NATHANKIMMEL.com ♦ sales@nathankimmel.com

Proud Members of

